




Nexus 3 Speaker Cable

TECHNOTES

w/Speakon
Connector

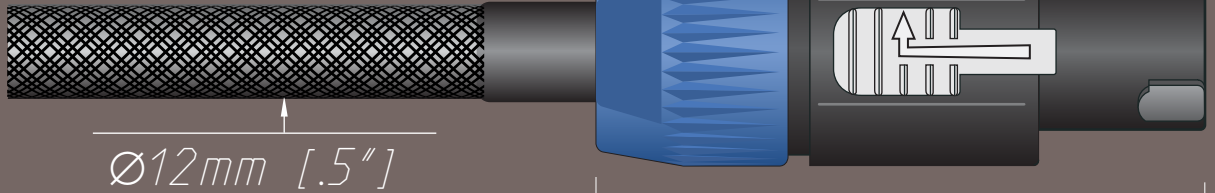

Ø12mm [0.5"]

70mm [2.75"]
Ø25mm [1"]

Conductors: OFHC Copper-FMS fine wire helical serve.

Dielectric materials:
TPFE (Teflon) and PE.

Cable Capacitance: 70 pF/ft.

DC resistance:


One meter loop =.02 Ohms

Power Rating: 500 W
continuous music power.

Inductance: Less than .1mH/ft.

Shield: Tinned copper braid.


Breakout Connectors: FMS Spade
(Gold-Plated copper)



Connectors: Banana (Gold-Plated spring copper)



Cable min. bend diameter: 6".

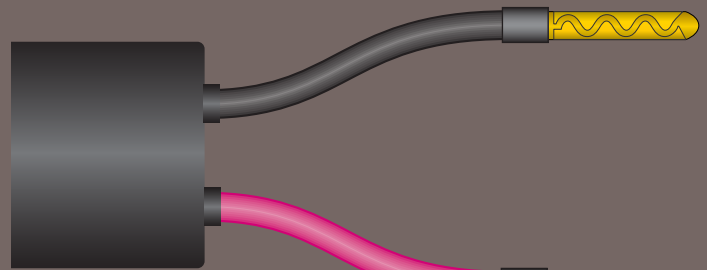

25mm [1"]


75mm [3"]



2Y1S-BiWire



1Y2S-Jumper



1Y1S-Spade



1YB-Banana

Breakouts

FMS Cable

Phone: (805) 277-0605 Fax: (805) 504-1349

FMS Nexus-3 Speaker Cable
© 2006 FMS Cable
A. W. Gibson